


MV4014SA HD fixed focus fisheye lens

Instructions

一 . Dimensions :

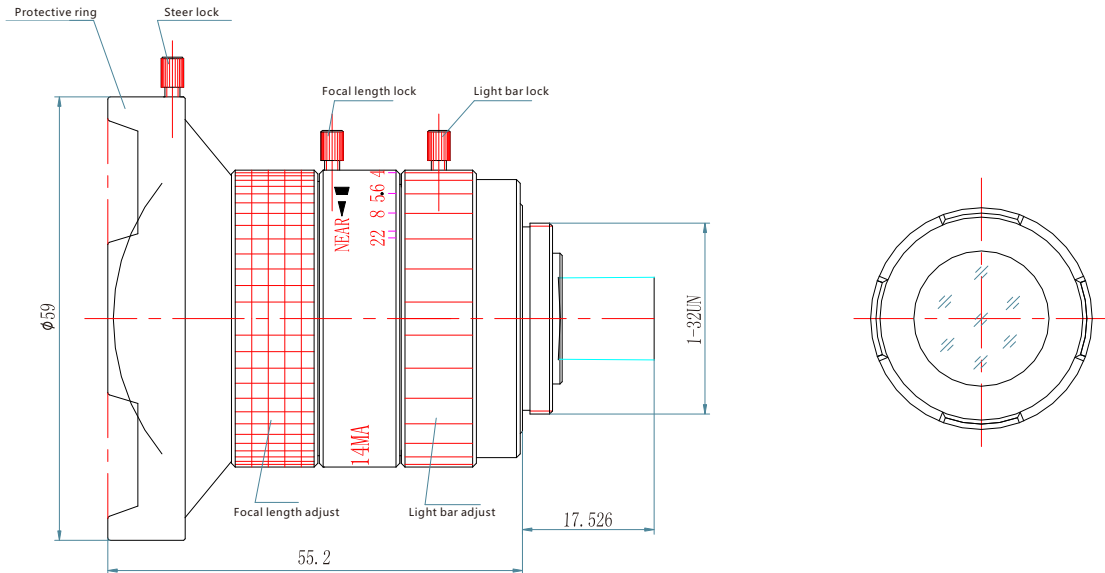

二 . Main Specifications :

F (mm)	Relative aperture	Field angle	Image size	Close WD	Mount
4	1:1. 4 ~ 22	152° (Φ11mm)	Φ 11mm	120mm	C

三 . Installation :

1. Open the front and back cover of the lens.
2. Rotate lens to the camera and rotate it to the end.
3. Rotate the protective ring, lock it after the image is not cut.
4. Rotate and lock steer lock after image is clear.
The protective ring can also be disassembled.
5. Rotate the light bar adjust, to achieve the best light intensity.

四 . Maintenance :

1. The lens is fragile and should be lightly put when loading and unloading.
2. The lens is an optical instrument, the lens surface will fog when the temperature mutation. Use a blow ball or light a bulb to dry.
3. You can remove dust and stains on lens surface with absorbent cotton dipped with a small amount of anhydrous ethanol and ether (6: 4) .
You can also use special lens paper.
4. Lens should be placed in a dry place if not used for a long time.